


	product	qty	ver.		ſ
BOK	Sinatra 2000 LF XXX-XX CG BS NG- XX	1	#00	XX	l





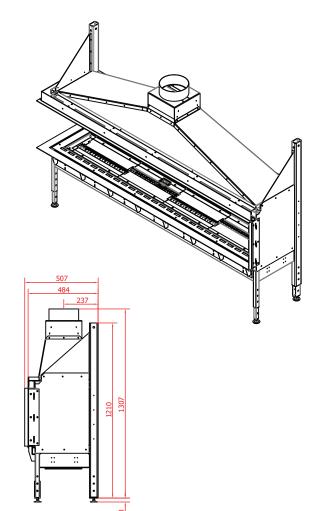

Fuel type - G20 (NG - 20mbar) Maximal gas rate- ~2,09 m Heat input (Hi)- ~19,74 kW

Fire view- [LF]- Left Front
Interior finish- [BS] - Black Steel
Glazing- [CG]- Ceramic glass
Installation place- [XX]- XX

Flue system- conventional Control- Remote control and SHS Combustion system- open Power supply- 230V, 50Hz with grounded cable



Fireplace montage in accordance with installation manual.

Gas supply installation and gas conections must be performed in accordance with local regulations and requirements.